

AllStyle

UP-FLOW UNCASSED COILS ASUC(P)-A & ASUC (P)-M



STANDARD FEATURES

HEAVY RIFLED COPPER TUBING
ALUMINUM FINS
HEAVY ALUMINUM END PLATES
DUAL RATED FOR R-22 AND R-410a
PRESSURE TESTED TO 450 LBS.
POLYMER DRAIN PAN
PITCHED DRAIN PAN WITH HEAT SHIELD
METERING DEVICE IS ACCESSIBLE
FROM PLENUM EXTERIOR



OPTIONAL FEATURES


RIGHT HAND DRAIN CONNECTIONS
RIGHT HAND REFRIGERANT CONNECTIONS
GALVANIZED STEEL OR NYLON DRAIN PANS
A CHOICE OF THERMAL EXPANSION VALVES
HEAT PUMP (P) COMPATIBLE
5 DIFFERENT COIL WIDTHS
ENHANCED ALUMINUM FINS
ANTI-MICROBIAL DRAIN PANS



5-YEAR LIMITED WARRANTY AGAINST COIL LEAKAGE
5-YEAR LIMITED WARRANTY AGAINST DRAIN PAN BREAKAGE
1-YEAR LIMITED PARTS WARRANTY

AllStyle

UP-FLOW UNCASSED COILS ASUC(P)-A & ASUC (P)-M

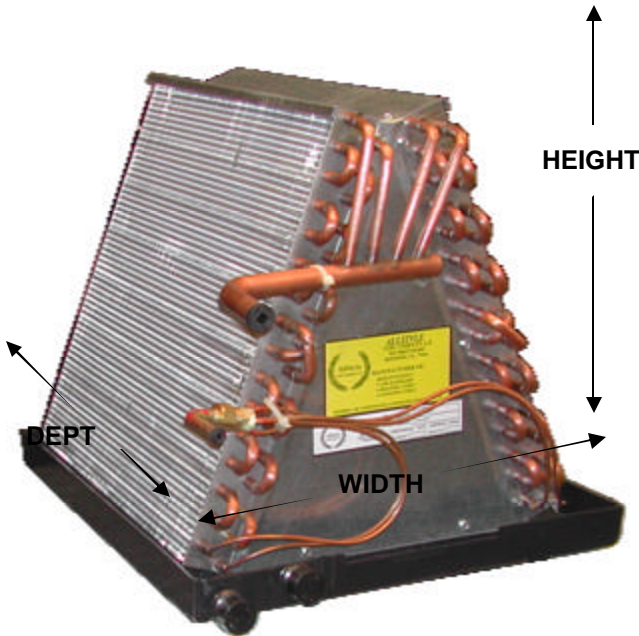

Specify coil width needed when ordering.

Example: ASUC24-A264T+D-5LH

Specify left or right hand
refrigerant and drain connections.

Example: ASUC24-A264T+D-5 LH

To specify a heat pump coil, when ordering add
"P" (heat pump) in the coil model number.

Example: ASUCP24-A264T+D-5LH

3/4" MPT primary & secondary drain connections

3/8" liquid line connection

Refrigerant suction line connections:

1.5 to 3.0 ton 3/4"

3.5 to 5.0 ton 7/8"

UNCASSED COIL DIMENSIONS			
Coil	Uncased	Uncased	Uncased
Width	Depth	Width	Height
Code			
5	19.50"	13.00"	****
6	19.50"	15.00"	****
7	19.50"	17.00"	****
8	19.50"	20.00"	****
9	19.50"	24.00"	****

Coil Height will vary depending on the coil used.

Call AllStyle for specific information about
your application.

Specifications may change without notice.



AllStyle Coil Company, Inc.

7037 Brittmore Houston, TX 77041

Ph: 713-466-6333 Fax: 713-466-6363

Standard Coil Heights for Un-Cased Coil Slabs

Coil	Coil Height	Coil	Coil Height
ASUCXX-A160T	17-1/2"	ASUCXX-M120T	13-1/2"
ASUCXX-A180T	19-1/2"	ASUCXX-M140T	15-1/2"
ASUCXX-A212T	11-1/2"	ASUCXX-M160T	17-1/2"
ASUCXX-A214T	11-1/2"	ASUCXX-M180T	19-1/2"
ASUCXX-A222T	13-1/2"	ASUCXX-M242T	15-1/2"
ASUCXX-A224T	13-1/2"	ASUCXX-M244T	15-1/2"
ASUCXX-A242T	15-1/2"	ASUCXX-M262T	17-1/2"
ASUCXX-A244T	15-1/2"	ASUCXX-M264T	17-1/2"
ASUCXX-A262T	17-1/2"	ASUCXX-M282T	19-1/2"
ASUCXX-A264T	17-1/2"	ASUCXX-M284T	19-1/2"
ASUCXX-A282T	19-1/2"	ASUCXX-M202T	21-1/2"
ASUCXX-A284T	19-1/2"	ASUCXX-M204T	21-1/2"
ASUCXX-A202T	21-1/2"	ASUCXX-M2Z4T	15-1/2"
ASUCXX-A204T	21-1/2"		
ASUCXX-A342T	15-1/2"		
ASUCXX-A344T	15-1/2"		
ASUCXX-A362T	17-1/2"		
ASUCXX-A364T	17-1/2"		
ASUCXX-A380T	19-1/2"		
ASUCXX-A382T	19-1/2"		
ASUCXX-A384T	19-1/2"		
ASUCXX-A301T	21-1/2"		
ASUCXX-A302T	21-1/2"		
ASUCXX-A304T	21-1/2"		
ASUCXX-A3Y2T	23-1/2"		
ASUCXX-A3Y4T	23-1/2"		
ASUCXX-A400T	21-1/2"		
ASUCXX-A4Y0T	23-1/2"		
ASUCXX-A4Y4T	23-1/2"		
ASUCXX-A4Z4T	25-1/2"		